



65Watt Polycrystalline Solar Module

Features
High power output module conversion efficiency with stable cell production technology.

Anti-reflective and anti-soiling surface reduces power loss from dirt and dust.

Outstanding performance in low-light irradiance environments.

Certified to withstand: wind load and snow load.

High salt mist and ammonia resistance certified by TUV Rheinland.


Quality and Safety
Designed according to and complying with all requirements in IEC 61730, IEC 61215, UL1703, CEC Listed, MCS and CE.

ISO 9001:2008:Quality management systems.
ISO 14001:2004:Environmental management systems.
BS OHSAS 18001:2007:Occupational health and safety management systems.



25-YEAR WARRANTY

Warranties

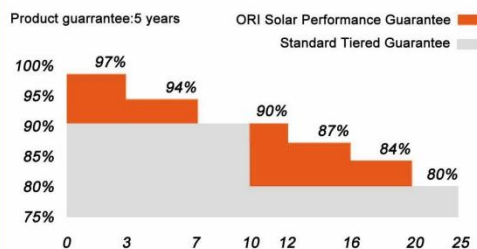

Electrical Characteristics


Model	ORI-65D-12/SEA
Optimum Operating Voltage (Vmp)	17.6V
Optimum Operating Current (Imp)	3.69A
Open-Circuit Voltage (Voc)	21.8V
Short-Circuit Current (Isc)	4.11A
Maximum Power at STC (Pmax)	65Wp
Nominal Voltage	12V
Operating Temperature	-40°C to +85°C
Maximum System Voltage	1000V(IEC)/600V(UL)
Maximum Series Fuse Rating	15A
Power Tolerance	±10%

General Characteristics

Solar Cell	Polycrystalline
Number of Cells	36 (4x9)
Dimension	771x665x30mm (30.4x26.2x1.2 inches)
Weight	6.2 Kgs (13.7 lbs)
Front Glass	3.2mm tempered glass
Frame	Anodized aluminum alloy
Mechanical load	5400 pa
Classification	Application class A; IP65; H4 connector Output Cables Symmetrical length (±1750mm/29.5 inches)

IV Curves

Module IV Graph 65W

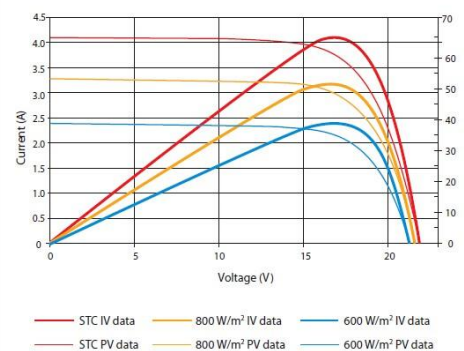

Temperature Coefficients

NOCT (°C)	45±2
Temperature Coefficient of Pmax (%/°C)	-0.47
Temperature Coefficient of Voc (%/°C)	-0.34
Temperature Coefficient of Isc (%/°C)	0.045

